


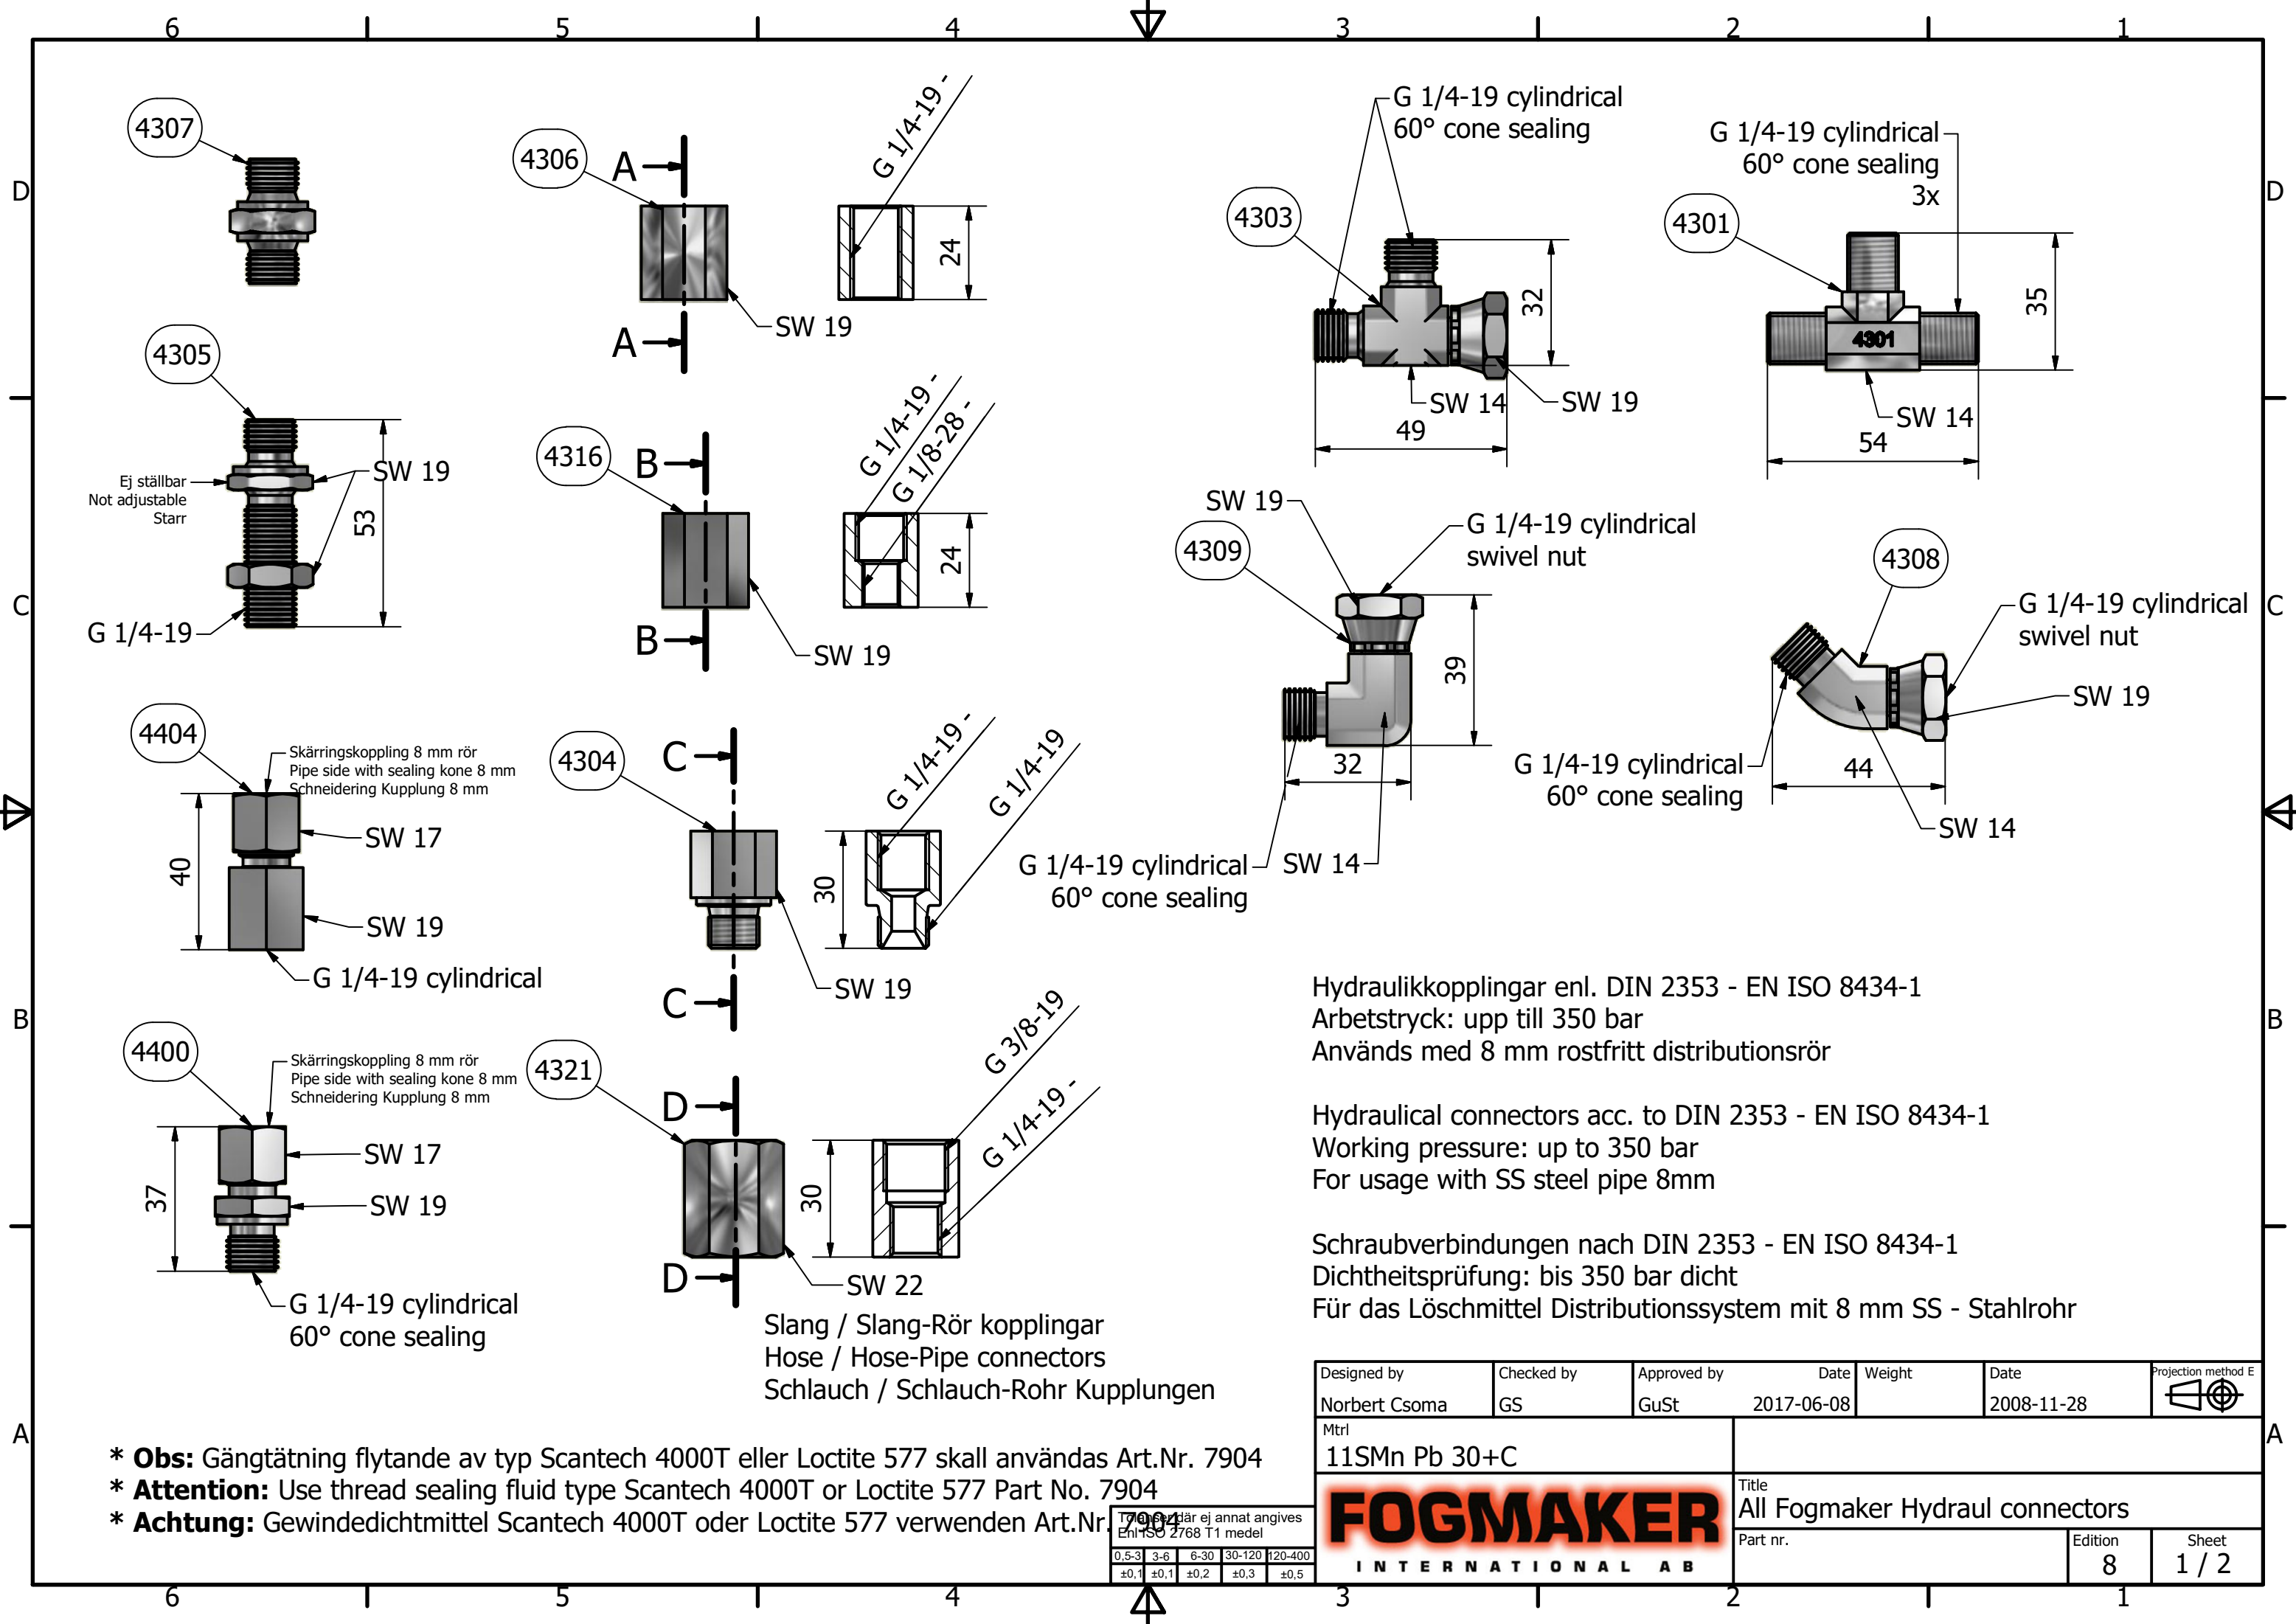

Hydraulikkopplingar enl. DIN 2353 - EN ISO 8434-1
Arbetsstryck: upp till 350 bar
Används med 8 mm rostfritt distributionsrör




Hydraulic connectors acc. to DIN 2353 - EN ISO 8434-1
Working pressure: up to 350 bar
For usage with SS steel pipe 8mm

Schraubverbindungen nach DIN 2353 - EN ISO 8434-1
Dichtheitsprüfung: bis 350 bar dicht
Für das Löschmittel Distributionssystem mit 8 mm SS - Stahlrohr







Designed by	Checked by	Approved by	Date	Weight	Date	Projection method E
Norbert Csoma	GS	GuSt	2017-06-08		2008-11-28	
Mtrl						
11SMn Pb 30+C						
FOGMAKER			Title			
INTERNATIONAL AB			All Fogmaker Hydraul connectors			
			Part nr.		Edition	Sheet
					8	1 / 2

* **Obs:** Gängtätning flytande av typ Scantech 4000T eller Loctite 577 skall användas Art.Nr. 7904
* **Attention:** Use thread sealing fluid type Scantech 4000T or Loctite 577 Part No. 7904
* **Achtung:** Gewindedichtmittel Scantech 4000T oder Loctite 577 verwenden Art.Nr. 7904

Tillämpa här ej annat anges Enl. ISO 2768 T1 medel					
0,5-3	3-6	6-30	30-120	120-400	
±0,1	±0,1	±0,2	±0,3	±0,5	

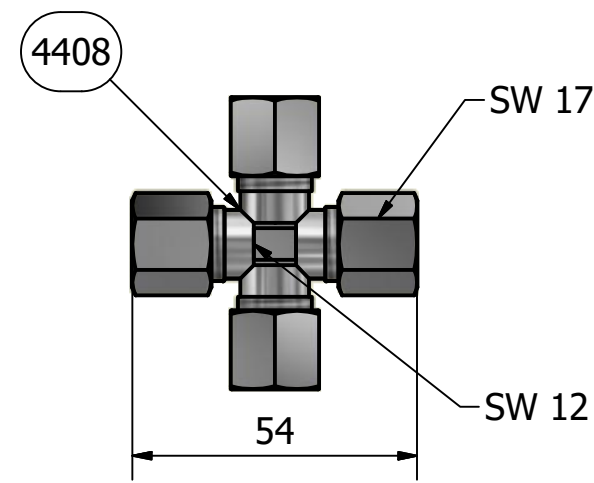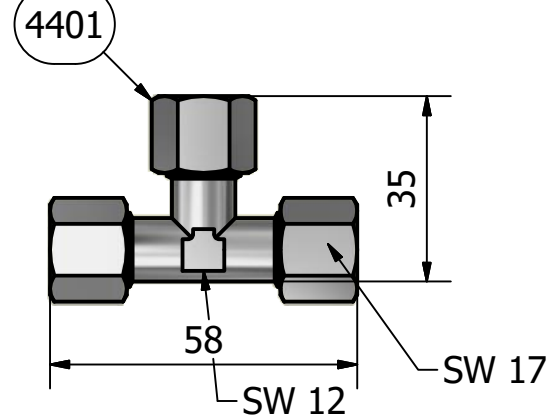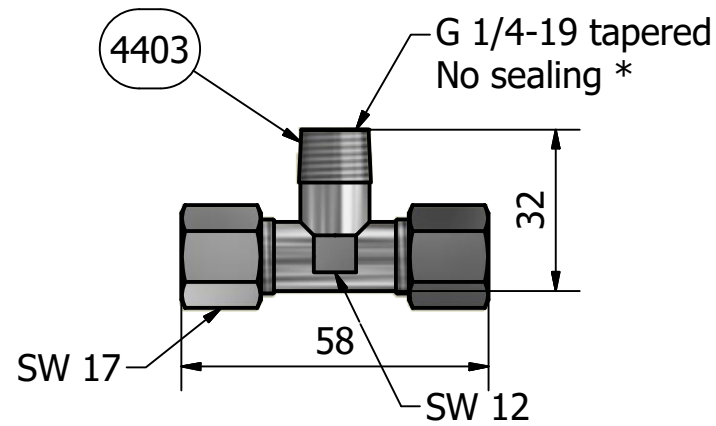

Rörkopplingar 8mm
Pipe connectors 8mm
Rohr Kupplungen 8mm

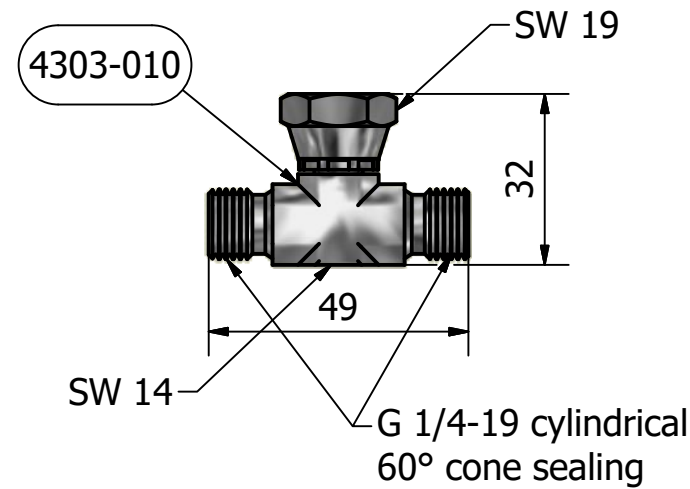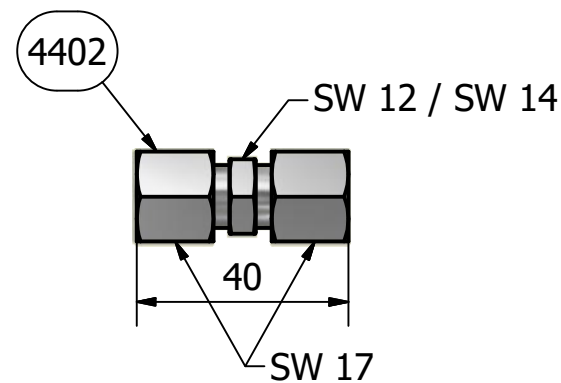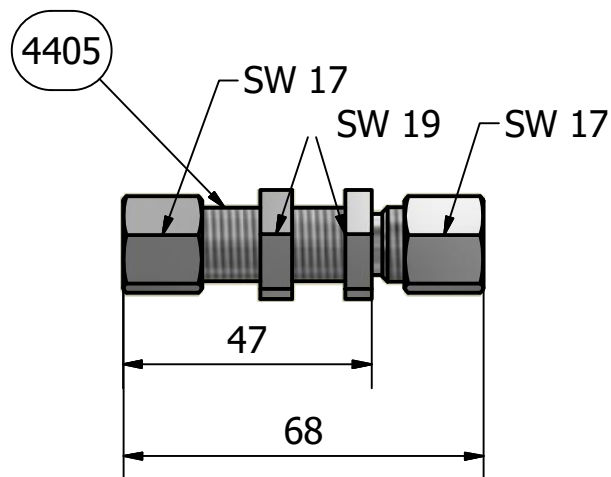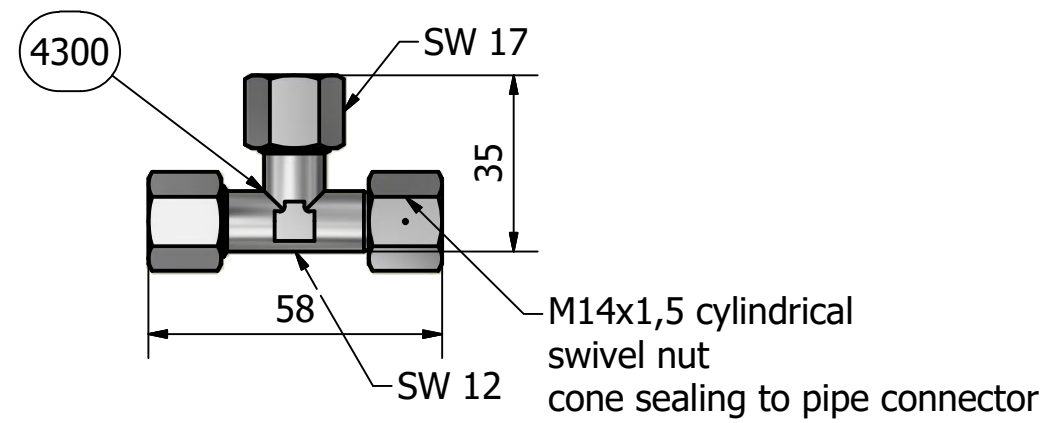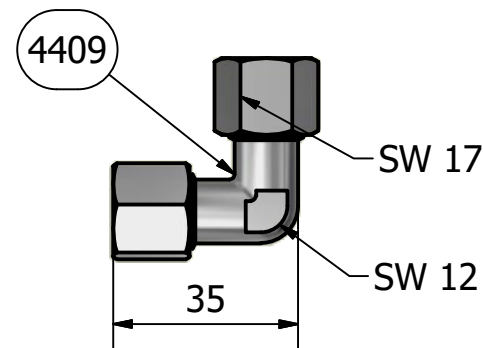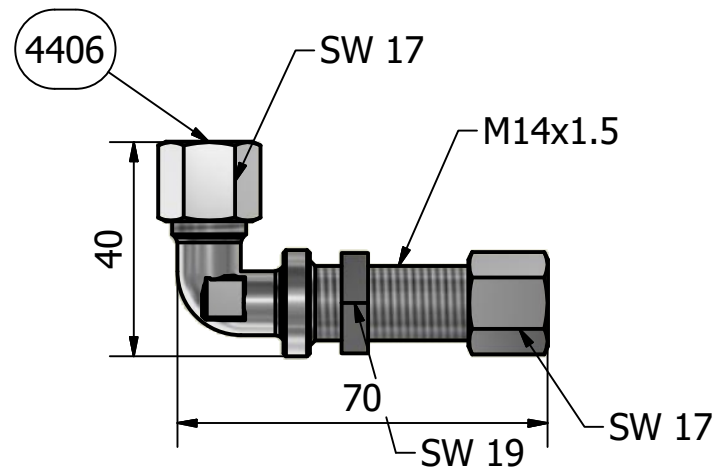


Hydraulikkopplingar enl. DIN 2353 - EN ISO 8434-1
Arbetstryck: upp till 350 bar
Används med rostfritt 8 mm distributionsrör

Hydraulic connectors acc. to DIN 2353 - EN ISO 8434-1
Working pressure: up to 350 bar
For usage with SS steel pipe 8mm

Schraubverbindungen nach DIN 2353 - EN ISO 8434-1
Dichtheitsprüfung: bis 350 bar dicht
Für das Löschmittel Distributionssystem mit 8 mm SS - Stahlrohr

- * **Obs:** Gängtätning flytande av typ Scantech 4000T eller Loctite 577 skall användas Art.Nr. 7904
- * **Attention:** Use thread sealing fluid type Scantech 4000T or Loctite 577 Part No. 7904
- * **Achtung:** Gewindedichtmittel Scantech 4000T oder Loctite 577 verwenden Art.Nr. 7904

Designed by	Checked by	Approved by	Date	Weight	Date	Projection method E
Norbert Csoma	GS	GuSt	2017-06-08		2008-11-28	
Mtrl						
11SMn Pb 30+C						
 INTERNATIONAL AB			Title			
			All Fogmaker Hydraul connectors			
			Part nr.		Edition	Sheet
					8	2 / 2

Tolanser där ej annat anges Enl ISO 2768 T1 medel					
0,5-3	3-6	6-30	30-120	120-400	
±0,1	±0,1	±0,2	±0,3	±0,5	